

For Floor Mounted Vertical Sliding Units

- Increases visual communication effectiveness by maximizing usable surface area in a minimum amount of wall space.
- Can be designed with any combination of writing and tackable surfaces for the fixed and sliding panels.
- Heavy-duty aluminum extrusions come standard in Clear Satin Anodized. Also available in optional Dark Bronze Anodized or a variety of Powder Coated finishes.
- Perfectly balanced weights give a smooth, easy motion in raising or lowering a sliding panel. Available in Single, Double or Triple Track Configuration.

Suggested Specification

PART 1 - GENERAL

- 1.1 SECTION INCLUDES
 - A. Porcelain-on-Steel Markerboards.
 - B. Porcelain-on-Steel Chalkboards.
 - C. Vinyl Cork Tackboards.
 - D. Visual Display Board Accessories.
- 1.2 RELATED SECTIONS
 - A. Section 06100 – Wood or Steel Blocking.
 - B. Section 09000 – Gypsum Wall Board.
 - C. Section 09720 – Vinyl Wall Coverings.
 - D. Section 09900 – Paints and Coatings.
- 1.3 REFERENCES
 - A. ASTM B221 – Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes and Tubes.
 - B. ASTM E84 – Test Method for Surface Burning and Characteristics of Building Materials.
 - C. ASTM C540 – Gloss Test for Porcelain Enamel Steel (Porcelain Enamel Institute PEI-501).
- 1.4 SUBMITTALS
 - A. Submit products and samples under provisions of Section 01300.
 - B. Product Data: Provide technical data for products specified. Include Material Safety Data Sheets, when applicable.
 - C. Shop Drawings: Provide shop drawings for each type of visual display board specified including section details indicating trim, face, core and backing materials, wall elevations, dimensions, joint locations and special anchor details.
 - D. Color Samples: Submit set of color chips displaying manufacturer's full range of colors and finishes.
 - E. Product Samples: Submit samples not less than twelve inches square and framed on two adjacent sides, to illustrate materials, finish, color, and configuration of each type of visual display board required.
 - F. Care and Maintenance Data: Provide data on cleaning requirements, stain removal and recommended maintenance precautions.
- 1.5 DELIVERY, STORAGE, AND HANDLING
 - A. Comply with manufacturer's instructions for handling and storage of Visual Display Boards.
- 1.6 PROJECT CONDITIONS
 - A. Field measure prior to preparation of shop drawings and fabrication to ensure proper fit.
 - B. General contractor to maintain proper climate before, during and after installation.
- 1.7 WARRANTY
 - A. Submit manufacturer's "Life of Building" warranty, stating that under normal usage and maintenance, and when installed in accordance with manufacturer's instructions and recommendations, Porcelain-on-Steel Markerboards and Chalkboards are guaranteed for the life of the building.
 - B. Warranty shall cover replacement of defective Porcelain-on-Steel Markerboards and Chalkboards due to discoloration, excessive fading of color, crazing, cracking or flaking. Warranty does not cover the cost of removal or reinstallation.

PART 2 - PRODUCTS

- 2.1 MANUFACTURERS
 - A. Provide visual display boards as manufactured by Platinum Visual Systems™, a division of ABC School Equipment, Inc., Corona, California.
Tel: (800)498-2990 Fax: (951)817-9900. Email: info@pvsusa.com Website: www.pvsusa.com
 - B. Substitutions: See Section 01600 - Product Requirements.
- 2.2 MARKERBOARD AND CHALKBOARD MATERIALS
 - A. Steel Face Sheets: Writing surface will be Writanium® 28 gauge steel face with porcelain enamel finish fused to the steel sheet using a continuous coil process.
 1. Markerboard and Chalkboard surface shall be fused at a temperature of 1450° and 1200° respectively.
 2. The gloss of the writing surface will not increase more than three units when subjected to wearability tests specified in testing procedures for 30 hours.
 - B. Sliding Markerboard And Chalkboard Panels:
 1. Core Material: 7/8 inch honeycomb.
 2. Subframe: 7/8 inch x 2 inch aluminum tube.
 3. Backing Material: .015 inch aluminum sheet.
 4. Metal Trim and Accessories: 6063 aluminum alloy with a T5 temper.
 5. Adhesive: As recommended by manufacturer for project conditions.
 - C. Fixed Markerboard And Chalkboard:
 1. Core Material: 1/2 inch particle board.

Floor Mounted Vertical Sliding Unit

2. Backing Material: .005 inch aluminum foil.
3. Metal Trim and Accessories: 6063 aluminum alloy with a T5 temper.
4. Adhesive: As recommended by manufacturer for project conditions.

2.3 VINYL CORK TACKBOARD MATERIALS

- A. Vinyl Face Sheets: Vinyl surface will be Type II self-healing, weighing not less than 21 ounces per lineal yard. Pattern to be a Harborweave.
 1. Vinyl shall be washable and mildew resistant.
- B. Sliding Tackboard Panels:
 1. Core Material: 1/4 inch natural cork underlayment laminated to 5/8 inch honeycomb.
 2. Subframe: 5/8 inch x 2 inch aluminum tube.
 3. Backing Material: .015 inch aluminum sheet.
 4. Metal Trim and Accessories: 6063 aluminum alloy with a T5 temper.
 5. Adhesive: As recommended by manufacturer for project conditions.
- C. Fixed Tackboard:
 1. Core Material: 1/4 inch natural cork underlayment.
 2. Backing Material: 1/4 inch hardboard.
 3. Metal Trim and Accessories: 6063 aluminum alloy with a T5 temper.
 4. Adhesive: As recommended by manufacturer for project conditions.

2.4 FLOOR MOUNTED VERTICAL SLIDING UNITS

- A. Provide Floor Mounted Vertical Sliding Units with Markerboards, Chalkboards and/or Tackboards for project from manufacturer's FVS Series.
 1. Metal trim and accessories: FVS Series aluminum extrusions with clear satin anodized finish.
 - a. Housing HS800: One piece housing and track to accept nylon guide for sliding panels. Housing will have cover plate to fit flush with unit.
 - b. Chalktray CR330: Standard continuous hollow box chalktray with ribbed section and molded aluminum end closures. Chalktray to be attached to sill plate.
 - c. Rubber Bumpers: Mounted inside tracks at top and attached to sill.
 2. Sliding Markerboard, Chalkboard and/or Tackboard Panels:
 - a. Frame CH300: Integrated channel frame with finger pull.
 - b. Nylon Guides: Four per panel attached to jambs.
 - c. Cable: Cross cabled plastic coated stainless steel aircraft cable. Four cables per panel.
 - d. Sheaves: Steel aircraft sheaves with ball bearing hubs.
 - e. Counterweights: Extruded lead weights with integrated plastic guides for quiet operation.
 3. Fixed Markerboard, Chalkboard and/or Tackboard:
 - a. Markerboard, Chalkboard and/or Tackboard will be recessed behind sliding panel with no exposed edges.
 - b. Butt Joints: Markerboard and Chalkboard will have horizontal factory edges butted together if height exceeds 5'. Joint will have concealed stabilizing spline. Tackboards will have horizontal wrapped edges.
 4. Kick Panel (Optional): Kick panel to be Markerboard, Chalkboard, Tackboard, Plastic Laminate or Paintable MDF.
 5. Size: As shown on drawings.
 6. Color: As selected from manufacturer's standard colors.

2.5 FABRICATION

- A. Laminate facing sheet and backing sheet to core material under pressure, using manufacturer's recommended adhesive.
- B. Provide factory-assembled visual display boards, except where sizes demand partial field assembly.
- C. Assemble units in one piece without joints, wherever possible. Where required dimensions exceed maximum panel size available, provide two or more pieces of equal length, as indicated on approved shop drawings. Assemble to verify fit at factory, then disassemble for delivery and final assembly at project site.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify that substrates are properly prepared to receive visual display boards. Do not begin installation until unsatisfactory conditions have been corrected.

3.2 INSTALLATION



- A. Comply with manufacturer's installation instructions.
- B. Install visual display boards level and plumb, keeping perimeter trim aligned in accordance with manufacturer's recommendations.

3.3 ADJUSTING AND CLEANING

- A. Verify that all accessories are installed as required for each unit.
- B. Upon completion of installation, clean surfaces and trim in accordance with manufacturer's recommendations, leaving all materials ready for use.



Floor Mounted Vertical Sliding Unit

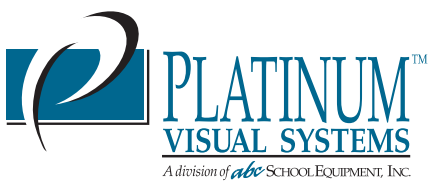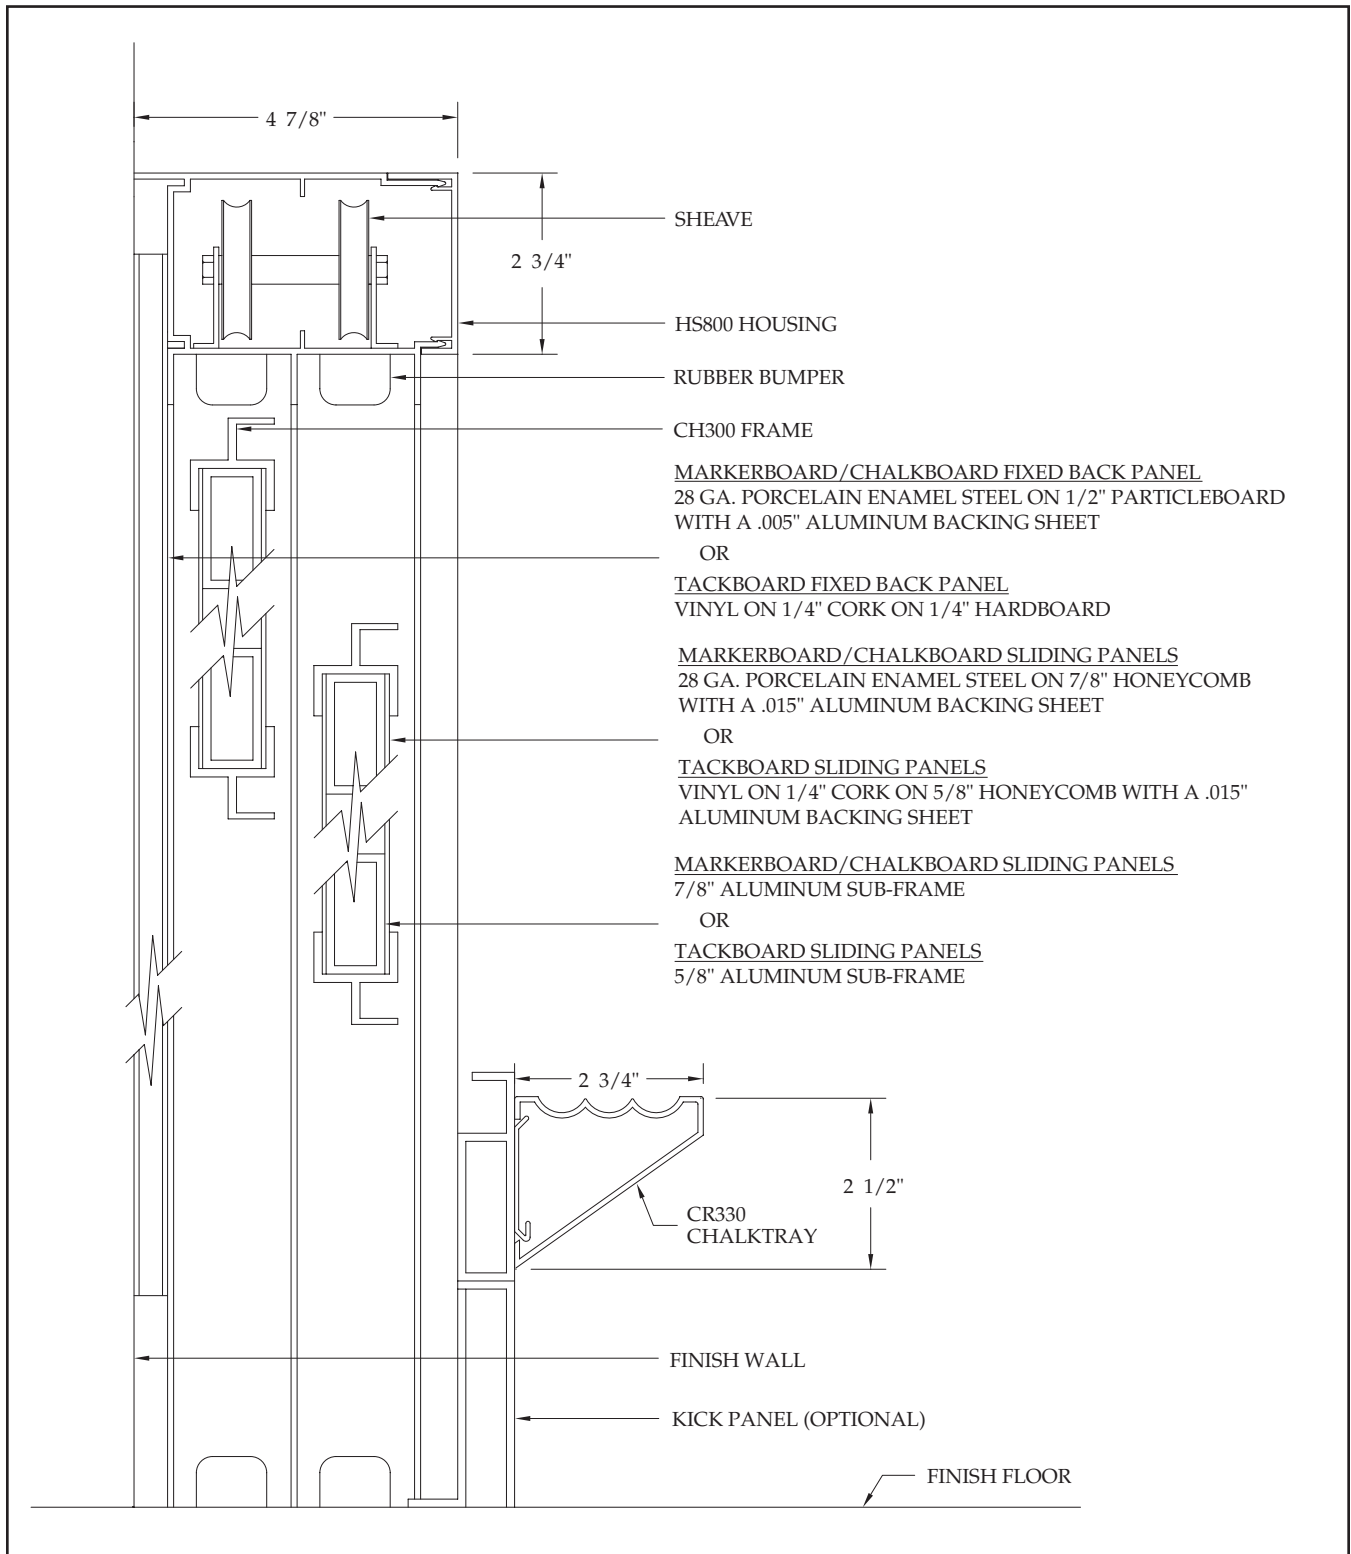

1020 Railroad Street, Corona, California 92882-1947
(800)498-2990 (951)817-2200 ■ Fax: (951)817-9900

www.pvsusa.com ■ info@pvsusa.com